


COMMERCIAL CONTROL VALVES



Performa™ Cv Control Valves

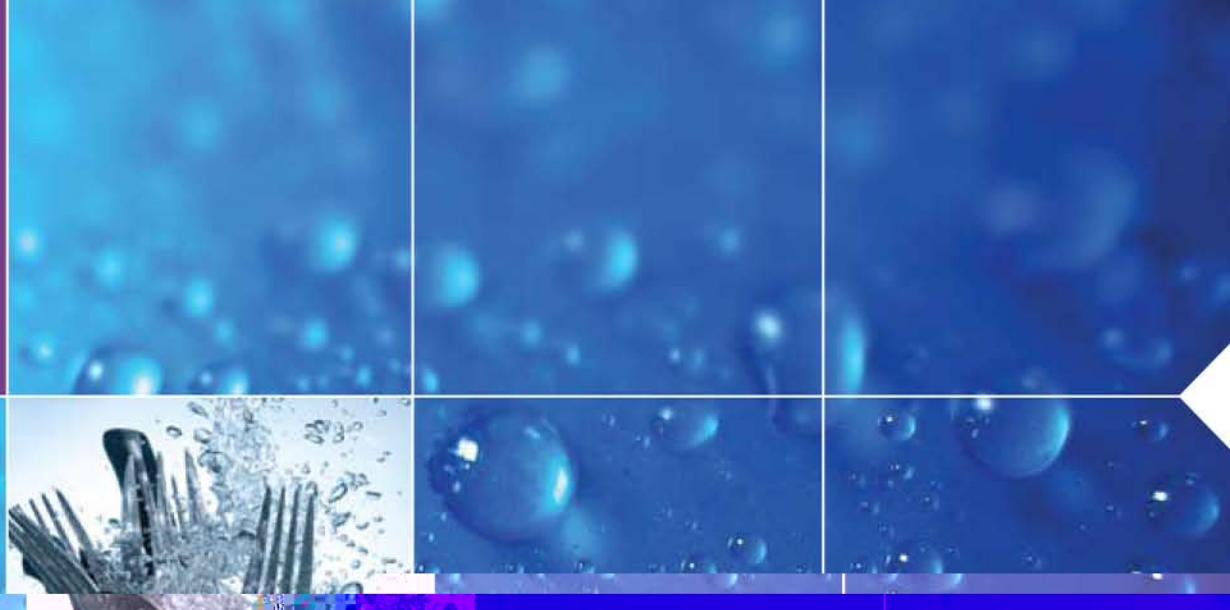

Control Water with a Cv Control Valve. Water is the most common fluid in a water supply system. A Cv Control Valve is the best choice for controlling water flow in a water supply system.

Control Water with a Cv Control Valve.

Control Water with a Cv Control Valve.

Control Water with a Cv Control Valve. Water is the most common fluid in a water supply system. A Cv Control Valve is the best choice for controlling water flow in a water supply system.

Control Water with a Cv Control Valve. Water is the most common fluid in a water supply system. A Cv Control Valve is the best choice for controlling water flow in a water supply system.

Control Water with a Cv Control Valve. Water is the most common fluid in a water supply system. A Cv Control Valve is the best choice for controlling water flow in a water supply system.

Control Water with a Cv Control Valve

Control Water with a Cv Control Valve. Water is the most common fluid in a water supply system. A Cv Control Valve is the best choice for controlling water flow in a water supply system.

Control Water with a Cv Control Valve. Water is the most common fluid in a water supply system. A Cv Control Valve is the best choice for controlling water flow in a water supply system.

Control Water with a Cv Control Valve

Control Water with a Cv Control Valve. Water is the most common fluid in a water supply system. A Cv Control Valve is the best choice for controlling water flow in a water supply system.



Control Water with a Cv Control Valve. Water is the most common fluid in a water supply system. A Cv Control Valve is the best choice for controlling water flow in a water supply system.




Dimensions

Valve Connections

Tank Thread	2-1/2-inches – 8, male
Inlet/Outlet Threads	1-3/4-inches – 12 UNC-2A male
Drain Line	3/4-inch NPT, male
Brine Line	3/8-inch NPT, male
Distributor Tube Diameter	1.050 inches (27 mm)
Distributor Tube Length	1/2 ± 1/2-inches (13 ± 13 mm) above top of tank

Outline Dimensions

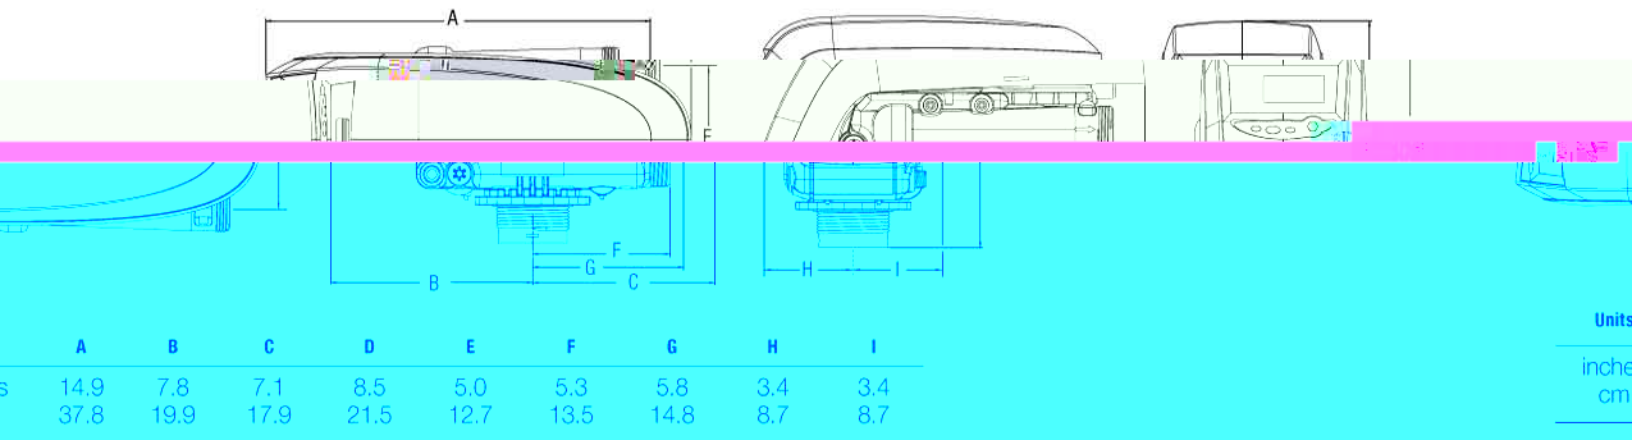


Performance

Flow Rates (Valve Only)

Service @ 15.0 psi (1.0 bar)
Backwash @ 25 psi (1.7 bar)
Service
Backwash

Controller Flow Rate Characteristics

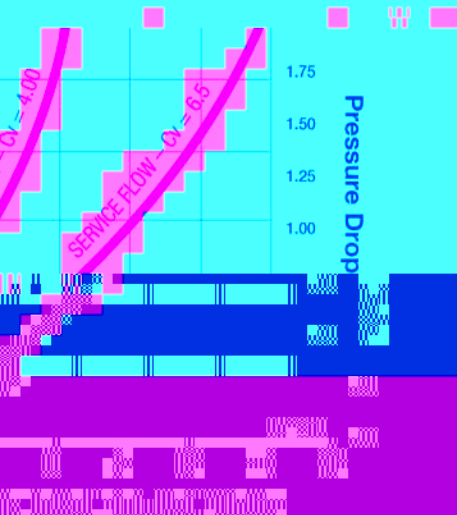


Backwash Flow Control Table

Number	(gpm)	(gpm)
9	2.2	8.3
10	2.7	10.2
12	3.9	14.76
13	4.5	17.0
14	5.3	20.0

*Backwash flow controls sized for 5.0 gpm/ft².

Logix™ Series Control

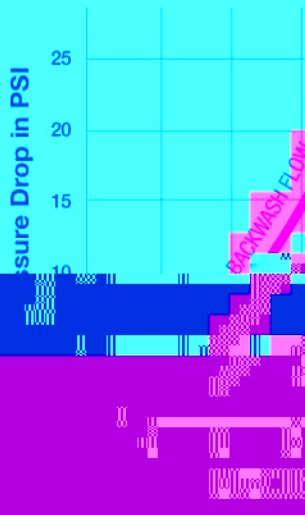


Injector* Performance

Logix™ Series Controllers

Injector "H" (Light Purple)
For 9-inch Tanks



Injector "J" (Light Blue)
For 10-inch Tanks

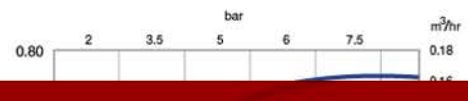

Toll Free: 800.273.1400
Fax: 202.236.4402

Toll Free: 800.273.1400
Fax: 202.236.4402

Customer Care: 800.273.1400